


**Residence:** \_\_\_\_\_ **Room:** \_\_\_\_\_ **Window(s):** \_\_\_\_\_

**Important:** If you plan on installing the shade in a place where you need to raise the entire shade above an obstacle (such as above doors that open), please refer to our [stacking guidelines](#) (P/N 368-2573) or contact customer service to determine how high to mount your shade.


## Step 1 Option A: Inside Mount Measurements

### Inside Mount Measurements


- Depth of window must be at least 1½" (38 mm) to use inside mounting option.
- Do not make any deductions from the width! Lutron will deduct ¼" (3 mm) per side on inside mounted shades to allow room for proper operation.
- Lutron will make NO additions or deductions to the height measurement.



#### Width:

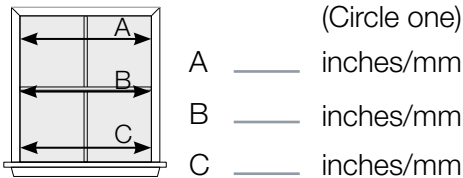

#### Height:

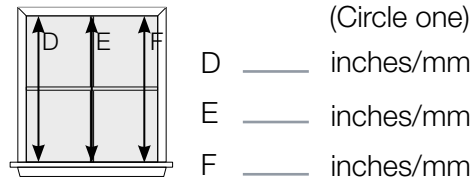


Order width: \_\_\_\_\_ inches/mm  
 (**Smallest** of the three measurements)



Order height: \_\_\_\_\_ inches/mm  
 (**Largest** of the three measurements)

## Step 1 Option B: Outside Mount On Trim Measurements

**Width:** The width of your shades is up to you. For example, if you'd like to completely cover the window, measure from edge to edge of the frame.

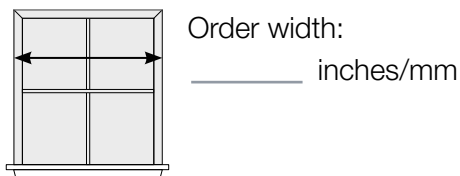


**Height:** Measure from the top of the trim to the windowsill.

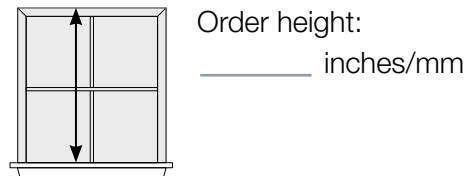



## Step 1 Option C: Outside Mount Above Trim Measurements

**Width:** The width of your shades is up to you. For example, if you'd like to completely cover the window, measure from edge to edge of the frame.

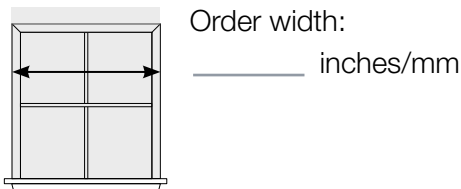

**Height:** Determine where you're going to mount the shade. Then measure from where the top of the headrail would fall, down to the windowsill.

**Note:** The motorized bracket is 2 5/8" (67 mm) high, however, it is recommended to allow for at least 3 1/8" (80 mm) of space above the top edge of the window trim (manual shade brackets require you to allow for 1 5/8" (42 mm)).

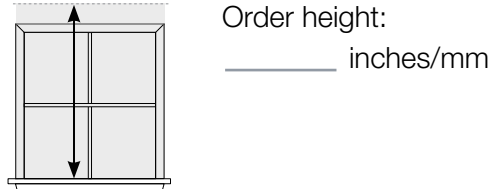

## Step 2 Select Pleat Style and Fabric

### Single-cell Light-filtering



- Point-bonded\*
- Spun Lace\*\*
  - Vinyl
  - Aluminum
- Crush
- Woven

### Double-cell Light-filtering



- Spun Lace

### Single-cell Sheer



- Sheer\*\*
  - Vinyl
  - Aluminum






### Single-cell Room-darkening



- Point-bonded\*
- Spun Lace\*\*
  - Vinyl
  - Aluminum

\* Available in fire rated fabrics.

\*\* Most fabrics come standard with either a vinyl or aluminum headrail. However, certain fabrics allow a choice in headrail material.



Fabric Color: \_\_\_\_\_ (see [www.serenashades.com](http://www.serenashades.com))

Fabric P/N: \_\_\_\_\_ (see [www.lutron.com/honeycombfabrics](http://www.lutron.com/honeycombfabrics) or [serena shade fabric binder](http://serena-shade-fabric-binder))

## Step 4 Select Power Options



Batteries



Plug-in



Manual

## Step 5 Select Stand Alone Control



RF Control  
(PJ-3BRL-GXX-T02)\*



Single group IR  
(SVIT-CS-WH)



4-group IR  
(SVIT-CSGC-WH)

Not required  
(previously purchased)

\* Select color of RF Control:



White (WH)



White/Grey (WG)



Ivory (IV)



Light Almond (LA)



Black (BL)

[www.lutron.com](http://www.lutron.com)



Please visit [www.serenashades.com](http://www.serenashades.com) to order your Serena shades.  
Have questions? Please contact your local Lutron sales representative.

World Headquarters 1.610.282.3800 | 24/7 Technical Support 1.800.523.9466 | Customer Service 1.888.LUTRON1 (1.888.588.7661)

© 05/2012 Lutron Electronics Co., Inc. | P/N 368-2408 REV F

Serena Support 1.888.445.8063

